

11/13/00  
JC923 U.S. PTO

BENNETT JONES

The Commissioner of Patents and Trademarks  
Washington, D.C. 20231,  
U.S.A.

JC929 U.S. PTO  
09/10782  
11/13/00

**BOX: PATENT APPLICATION**

Attorney Docket No.	44261-4
------------------------	---------

Sir:

Transmitted herewith for filing is the patent application of:

Inventors	(1) PEDERSON, Larry V., (2) COFFEY, Clayton G. and (3) HUDEMA, Henry
Title	LIGHT THERAPY DEVICE
Priority	Canadian application 2,300,569, filed March 14, 2000 and Canadian application 2,317,319, filed August 30, 2000

The application comprising:


40 pages of Disclosure;  
2 pages of Claims;  
1 pages of Abstract;  
3 sheet(s) of drawings.

and enclosed with the application are:

[ ☒ ] A post card.

This patent application is being submitted under **37 CFR 1.53(f)** and **35 U.S.C. 111**, without a Declaration and without the filing fee.

Respectfully submitted

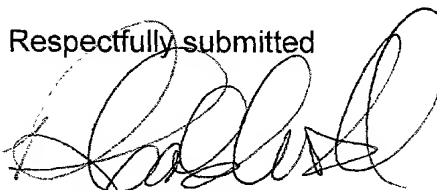

Roseann B. Caldwell  
Registration No. 37,077

BENNETT JONES LLP  
4500 Bankers Hall East  
855 - 2nd Street SW  
Calgary, Alberta T2P 4K7  
Canada  
Telephone: (403) 298-3661  
Fax: (403) 265-7219  
Encl.

Date: Nov 9, 2000

## LIGHT THERAPY DEVICE

### FIELD OF THE INVENTION

5

The present invention relates to a light therapy device and in particular to a light therapy device for treatment of light deficient disorders.

### BACKGROUND OF THE INVENTION

10

There is much support for the use of light therapy to overcome light deficient disorders. It has been proven that treatments involving shining light directly towards a patient's eyes will alleviate or cure light deficient disorders including Seasonal Affective Disorder (SAD), circadian sleep disorders and circadian disruptions associated with jet-lag, shift-work, PMS and bulimia.

15

There are two types of light therapy devices presently available. One type of device is large in size and floor or desk mountable. These devices include light sources of fluorescent bulbs. Although they can be moved from one position to another, they are not generally portable. In addition, the light source is quite fragile. The second kind of light therapy devices is head mountable. These devices are formed as eyeglasses or visors. While they are portable, they are not generally accepted by patients for use in public because of their odd appearance when worn on the head. This combined with safety concerns about eye damage given the proximity of the light source to the eye, has resulted in head mountable treatment devices failing to be generally accepted as a light therapy device.

20

25

These devices therefore are of limited use for persons requiring a portable and discreet treatment device. A light therapy device is needed for use by, for example, the business traveler that is portable and aesthetically appealing.

30

## SUMMARY OF THE INVENTION

The present invention provides a portable and lightweight hand-held light therapy device. The device is durable, being resistant to damage by normal transport. The device uses light emitting diodes (LEDs) as a source of light. LEDs offer a light source that is lightweight, small in size, simple, durable as well as energy efficient. The device is useful for travel and for in-flight use while being aesthetically acceptable.

10 In accordance with one aspect of the present invention, there is provided a light treatment comprising: an outer housing including a opening; a light emitting assembly in the housing and operable to emit light through the opening in the housing, the light emitting assembly including a plurality of LEDs capable of generating 2,500 lux to 7,500 lux at 12 inches.

15 The LEDs include at least some capable of emitting white-light. In one embodiment, the LEDs are arranged in a pattern over an area and the light emitting assembly is selected to emit light from the LEDs along a substantially straight line directly toward the user. Preferably, a diffuser screen of light diffusing sheet material is positioned  
20 over the LEDs to provide a more uniform emission of light. While LEDs do not emit any significant amount of ultraviolet radiation, the diffuser sheet material can include a UV filter, if desired.

The outer housing can include a first member and a second member, the first member  
25 and the second member being releasably locked together and the light emitting assembly being storable in the first member and being mountable on the housing such that the housing acts as a base to support the light emitting assembly. In one embodiment, the first and second members are pivotally connected and openable in a manner similar to a book. The first and second members, when closed enclose an  
30 inner compartment accessible by opening the first and second members about their pivotal connection. The light emitting assembly is storable in the inner compartment.

In this embodiment, the light emitting assembly can be mountable on the first member and the second member can act as a base.

- To facilitate therapy using the device, the housing can also accommodate a therapy calculator for determining a treatment regime based on an input of information.

## BRIEF DESCRIPTION OF THE DRAWINGS

- Figure 1 is a front elevation view of a light therapy device according to the present invention. A portion of the device has been cut away to facilitate illustration of internal components.

Figure 2 is a side elevation view of the light therapy device of Figure 1 with the support leg folded against the housing.

Figure 3 is a sectional view along line A-A of Figure 1.

- Figure 4 is a side elevation view of another light therapy device according to the present invention in a closed configuration.

Figure 5 is a side elevation view of the device of Figure 4 in an open configuration, ready for use.

Figure 6 is a front elevation of the device and configuration of Figure 5.

- Figure 7 is an elevation of a device for permitting mounting of a light therapy device in a passenger compartment of a vehicle. The device is aligned for insertion into a power port of a vehicle and a light therapy device is aligned for insertion into the docking bay of the device.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

- Referring to Figures 1 to 3, a light therapy device according to one embodiment of the present invention is shown. The device is small in size and resembles a large calculator or hand-held computer. Preferably, the outside dimensions of the device are less than about 7 inches wide, 7 inches high and 1.5 inches deep. The size can be varied as desired and with consideration as to portability, convenience and the components that must be contained therein.

The device includes an outer housing 10. The housing is preferably formed of a durable, impact resistant material such as, for example, a polymer (i.e. nylon, thermoplastic or blends thereof). Preferably, all housing parts are of minimal  
 5 thickness to provide suitable impact resistance and support for internal components while minimizing the weight of the device. The housing can be formed, as shown, in parts secured together by screws 12 or other fastening means.

The housing carries a light emitting assembly 20. The light emitting assembly is  
 10 mounted in the housing such that in operation light emitted therefrom is directed out through an opening 22 in the housing.

Light emitting assembly 20 includes a printed circuit (PC) board 26 providing electrical connection for light emitting diodes 28. The LEDs are spaced apart on the  
 15 board, with consideration as to their light output and wavelength, such that the assembly emits a light of illumination adequate for treatment of light deficient disorders. In particular, the light emitting assembly generates adequate illumination for treatment of light deficient disorders including Seasonal Affective Disorder (SAD), circadian sleep disorders and circadian disruptions associated with jet-lag,  
 20 shift-work, PMS and bulimia, which is between 2,500 and 7,500 lux, and preferably between about 3,500 and 5,500 lux at 12 inches from the assembly. To generate this level of illumination, the assembly generally includes between about 10 and 150 LEDs together having a total light output of between 50 and 500 candelas and preferably about 250 to 450 candelas. The number of LEDs in the light emitting  
 25 assembly may be reduced considerably as the efficiency of a LED is increased.

Using a light therapy device according to the present invention, treatments of acceptable duration can be administered. As an example, treatments for SAD can be completed in  $\frac{1}{4}$  to 4 hours and in most cases,  $\frac{1}{2}$  to 3 hours.

30

For bright-light therapy, preferably white LEDs are used. However, it is sometimes useful to combine light of different wavelengths and in some instances to approximate

the spectral properties or distribution of a tropical sunrise. Therefore, LEDs 28 can be entirely of the type emitting white light or, alternatively, LEDs emitting light of various wavelengths (i.e. red or amber) can be used with white light emitting diodes. The light generated by the light emitting assembly is preferably constant, though it may also be pulsed.

In one embodiment, a diffuser screen 32 is mounted over the diodes to create a more uniform, less harsh light emission. Preferably, LEDs 28 are mounted a suitable distance from diffuser screen 32 such that the light emitted by each LED overlaps on the screen and avoids the appearance of individual points of light behind the screen. If a diffuser screen is used, it is necessary to ensure that adequate levels of light, as set out above, are passed therethrough to permit treatment.

Power is supplied to the LEDs through electrical lines 34. Power can be provided through batteries or preferably, to reduce weight, through a jack 36 for connection to a 120v electrical supply (for use in North America). The device preferably operates using DC power and is supplied with an external AC-DC converter. Since the device is particularly useful during long distance travel in the treatment of jet lag, an adapter can be provided within the device or separately for device compatibility with foreign voltages of AC power or with DC power, as is provided through power ports mounted in aircraft armrests.

To facilitate light treatment, a support leg 40 can be provided for supporting the housing in a propped position such that light is emitted in a generally horizontal direction. In one embodiment, support leg 40 is connected by a hinge 42 to the rear of the housing such that the leg can be rotated between a supporting position and a stored position against the rear of the housing. A more complex stand for elevating the light illuminating assembly can be used, as desired.

The light treatment device can be mounted in a vehicle passenger compartment including, for example, a passenger or operator seat area. The vehicle can be, for example, an aircraft, a train, a bus, a truck or an automobile. In one embodiment, the

light treatment device is mounted in an aircraft seat back or in an aircraft seat armrest for use by air travelers. The device can be mounted in a manner similar to aircraft telephones, individual video monitors, and other such devices, wherein the light treatment device is attached to an adjustable extension arm, thereby enabling the user

5 to remove the light treatment device from an armrest and position it appropriately for treatment. Alternately, the light treatment device may be temporarily removed from its seat back mounting position and positioned on a tray table or other surface for treatment, while remaining secured to the seat back by means of a cable that could also serve as a power source. The device may also be mounted into an airliner flight

10 deck or other such areas of an airliner to provide discreet and convenient light treatments for pilots, flight attendants and other such on-board crew affected by jet lag and fatigue.

In another embodiment, the light treatment device can be mounted in the passenger

15 compartments of vehicles, for example, automobiles, transport trucks, buses, trains, and other such vehicles, wherein the device is stored when not in use but readily available to provide a light therapy treatment. In the case of automobiles and trucks, the device may be mounted on the underside of a sun visor, or within the glove compartment, or under the vehicle's dashboard. In the latter two examples, the device

20 can be attached to an adjustable extension arm in order to permit proper positioning for treatment.

The device may also be mounted so as to provide a light treatment for the driver or operator of these vehicles, with appropriate precautions being indicated for safe

25 operation of the vehicle, for example, at those times when the vehicle is parked or idle. One such embodiment is described hereinafter with reference to Figure 7.

Housing 10 can also be formed to accommodate other electronics, batteries etc. or to define storage space such as for cords, adapters, glasses or other items. The housing

30 can also include a cover or a case. Referring to Figures 4 to 6, a light therapy device according to another embodiment of the present invention is shown. The device has an outer housing including an upper housing member 110 and a lower housing

member 112. The housing members are connected by a hinge 114 that permits them to pivot relative to each other between a closed position shown in Figure 4 and an open position shown in Figures 5 and 6. When in the closed position, the housing members can be releasably locked together by a catch 116. The device is small in size and, when closed, resembles a portable compact disc player or a make-up compact.

The housing encloses a light emitting assembly 20. In the illustrated embodiment, light-emitting assembly 20 is mounted in the upper housing member. The light emitting assembly is mounted on the inwardly facing portion of the upper housing member so that, when the device is in the closed position, assembly 20 is protected within the housing members. In this way, the light emitting assembly, which is more fragile than the housing, is protected against damage during transport.

The device is opened for use to administer a light treatment. In a preferred embodiment, upper housing member 110 unfolds from the closed position by rotating about hinge 114. Lower housing member 112 acts as a base for supporting the light emitting assembly. Preferably, hinge 114 is of the type that permits self-locking in at least a few rotational orientations. The use of such a hinge permits that, for example, upper housing member can be oriented to direct the light downwardly, horizontally or, if preferred, in other directions. This is useful as it may be necessary, depending on the treatment, to have the light directed into the patient's eyes or alternately downwardly toward a workspace.

Counterweights (not shown) can be mounted in the lower housing member to prevent the device from tipping. Member 112 can also be formed to accommodate electronics, batteries etc. or to define storage space such as for cords, adapters, glasses or other items. Member 112 can also accommodate a treatment calculator, as will be described hereinbelow.

30

In one embodiment illustrated, for example in Figures 1 to 3, housing 10 also accommodates a calculator including a display 82, a key pad 84 and a processor



mounted within housing 10. The calculator is programmed to calculate a light treatment regime based on input of information. The calculator processor uses calculation references such as that known as the Jet Lag Calculator™ available from Bio-Brite, Inc., Maryland. In one embodiment, the calculator can be used to calculate  
 5 light treatment regimes for jet lag based on inputs of information, as follows:

Option 1

- i. Number of time zones crossed during trip
- ii. Direction of time zones crossed (East or West)
- 10 iii. Normal wake-up time of patient (for establishing the patient's "body clock")

Option 2

- i. Departure city
- 15 ii. Arrival city
- iii. Normal wake-up time of patient

Based on the input of the above-noted information, the calculator will then calculate and display a treatment regime including, for example, a period of light exposure and  
 20 a period of light avoidance. In option 2, the calculator determines the number of time zones through which travel will occur and uses this to calculate treatment regime. The calculator in one embodiment calculates a two-day treatment regime.

In one embodiment, the calculator keypad includes keys to be depressed when  
 25 inputting particular information. As an example, the keypad can include keys such as: "departure city", "destination city" and "wake up time". The calculator can be adapted to prompt the patient such as by displaying questions requesting the appropriate information. Preferably, the calculator includes a pause function capable of recording a time of treatment interruption and capable of outputting from memory  
 30 the portion of the treatment remaining when treatment is resumed.

In addition or alternately, the calculator can be programmed for calculation of other treatment regimes such as, for example, for treatments to alleviate fatigue in shift workers. Treatments for shift workers may include inputs such as work shift start time, previous shift time and normal waking time.

5

A speaker 88 is preferably provided for communication to the user. As an example, the speaker can communicate with the calculator processor to audibly prompt a user to input information. In addition, the speaker can function to emit an audible signal, such as an alarm, to alert a user to commence or modify a treatment. In one  
10 embodiment, the calculator processor controls a switch for the light emitting assembly such that it is turned on or off in response to a signal from the processor.

In a preferred embodiment, the calculator memory is capable of storing previous treatment regimes. These stored treatment regimes can be recalled from processor  
15 memory for repeat trips or shift work schedules.

If desired, to enhance the usefulness of the device, the calculator can also be programmed with other information including a clock, a standard mathematical calculator or other information such as an address book, etc.

20

As noted hereinbefore, a light therapy device according to the present invention can be mounted in a vehicle for use by passengers. One such embodiment is illustrated in Figure 7. A vehicle mounting adaptor 50 useful for mounting a light treatment device in a vehicle passenger compartment acts as an interface between the vehicle power  
25 port 52 (i.e. an in-dash cigarette lighter) and the light treatment device 54. In particular, at one end the adaptor has a power port contactor 56 for insertion into the power port. A locking collar 57 is threadedly engaged at the outboard end of the contactor 56. Once power port contactor 56 is inserted into power port 52, locking collar 57 can be tightened down about the port by threaded advancement to reinforce  
30 the engagement between port 52 and power port contactor 56.

At the opposite end, the adapter includes a docking port 58 with a recess 59 having therein electrical contactors 60. The light treatment device is mountable in the recess of docking port 58 in electrical communication with contactors 60. Venting slots 64 are formed through the docking port and positioned to substantially align with the  
5 vents 66 on light treatment device 54 to provide ventilation to the light treatment device therethrough.

Power cables (cannot be seen) extend between ends 56 and 58 to provide electrical communication therebetween. The power cables are housed within a bendable arm 68  
10 of the type including a corrugated tube and internal supports that can be bent into various orientations and, once positioned, will hold fast in that orientation. Arm 68 is bendable yet rigid enough to hold the weight of the light treatment device 54 and docking port 58 without moving out of the bended configuration into which it has been adjusted. Locking collar 57 also securely holds power port contactor 56 in  
15 power port 52 even against the weight of the light treatment device and against the stress of bending arm 68. Adapter 50 can be removed from power port 54 and stored when not required.

Numerous modifications, variations and adaptations may be made to the particular  
20 embodiments of the invention described above without departing from the scope of the invention as defined in the claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE  
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:


- 5     1.     A light therapy device comprising:  
         an outer housing including an opening;  
         a light emitting assembly in the housing and operable to emit light through the  
         opening in the housing, the light emitting assembly including a plurality of  
         LEDs capable of generating 2,500 lux to 7,500 lux at 12 inches.
- 10     2.     The light therapy device of claim 1 wherein at least some of the LEDs are  
         capable of emitting white-light.
- 15     3.     The light therapy device of claim 1 wherein a diffuser screen of light diffusing  
         sheet material is positioned over the LEDs.
- 20     4.     The light therapy device of claim 1 wherein the housing accommodates a  
         therapy calculator for determining a treatment regime based on an input of  
         information.
- 25     5.     The light therapy device of claim 1 wherein the housing includes a first  
         member and a second member, the first member and the second member being  
         releasably locked together and the light emitting assembly being storable in  
         the first member and being mountable on the housing such that the housing  
         acts as a base to support the light emitting assembly.
- 30     6.     The light therapy device of claim 5 wherein the first and second members are  
         pivotally connected.
7.     The light therapy device of claim 6 wherein the light emitting assembly is  
         mounted onto the first member and the second member forms a base for  
         support of the first member.

8. The light therapy device of claim 1 wherein the housing is mounted into a vehicle passenger compartment so as to provide light treatment to vehicle passengers or operators.

## ABSTRACT OF THE INVENTION

A light therapy device is taught including a light emitting assembly having light emitting diodes (LEDs) as a light source. The light emitting assembly capable of  
5 generating 2,500 lux to 7,500 lux at 12 inches.

20250428

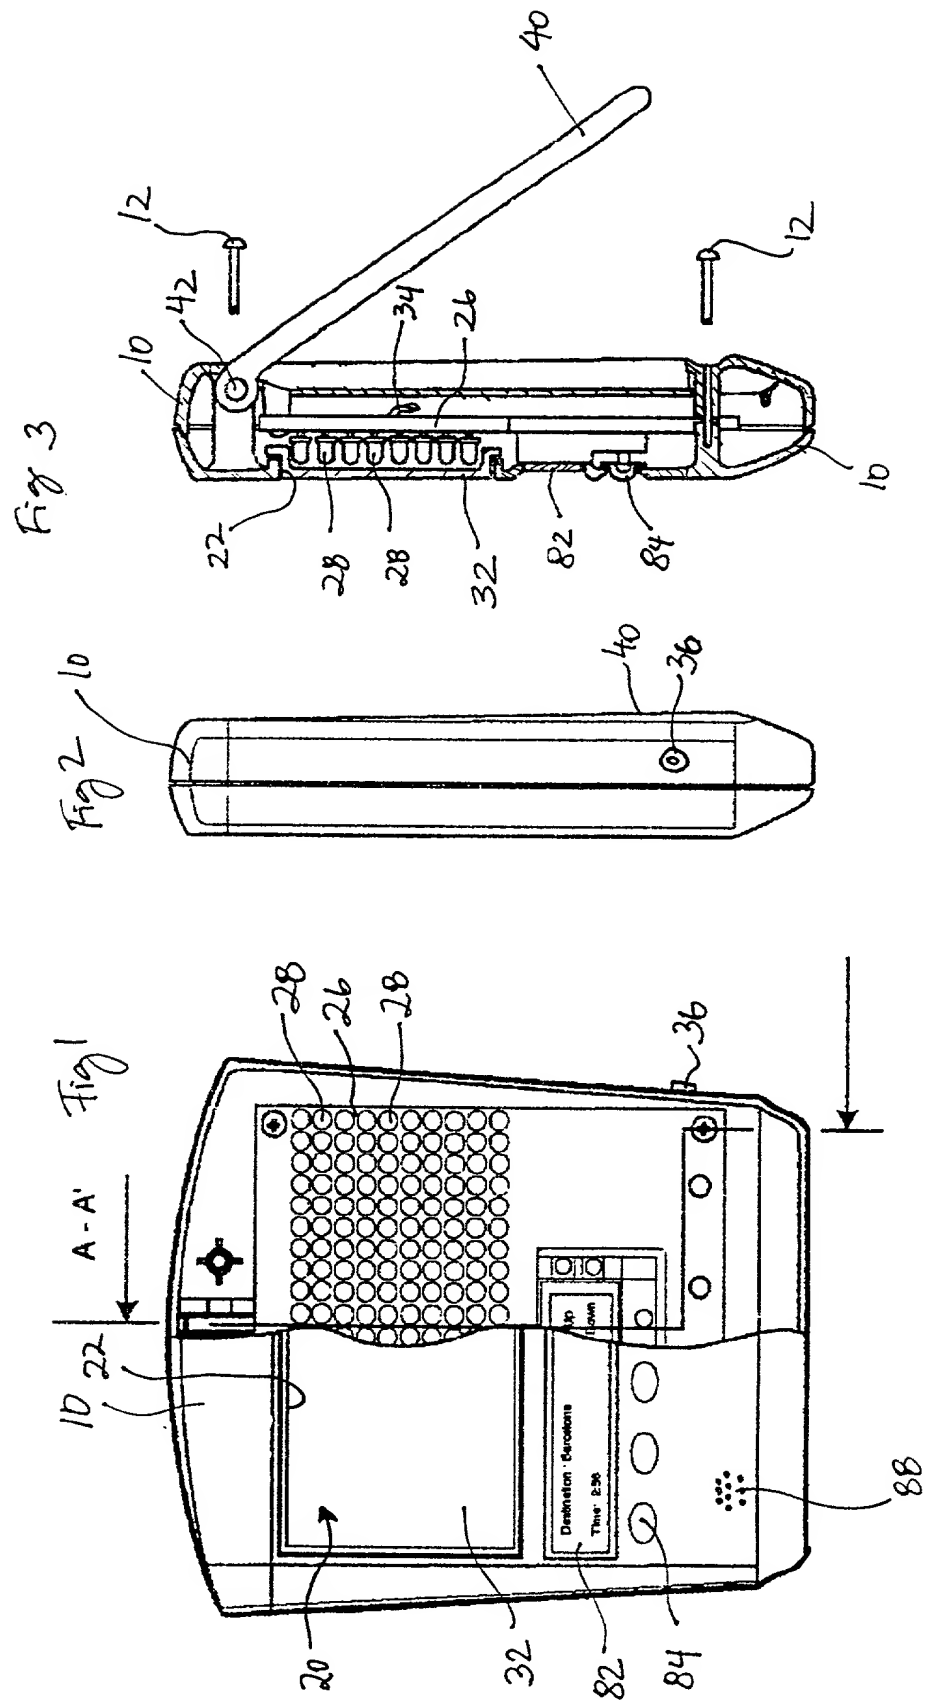

[illegible][illegible]

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---




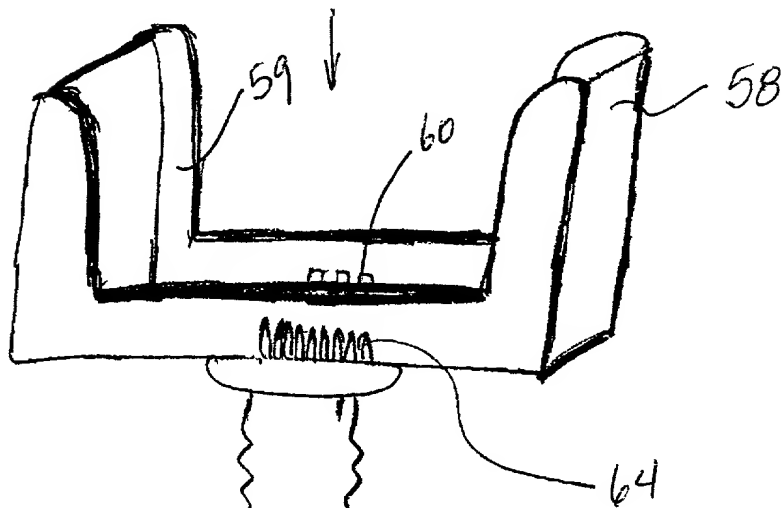


Figure 7

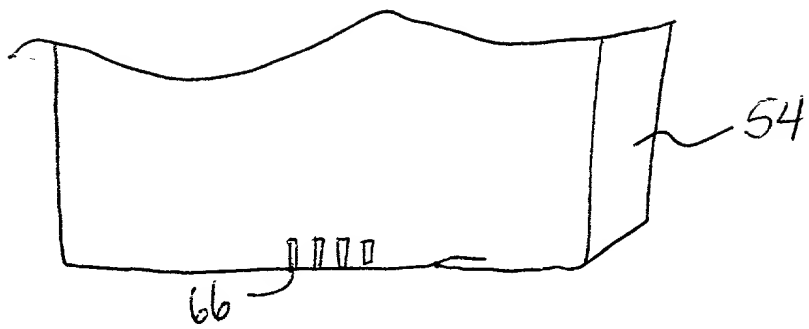